



Table of Contents


1.	USB Dongle Bind License	3
1.1.	Bind License Online	3
1.2.	Bind License Offline	5
2.	USB Dongle Activation	7
2.1.	Standalone USB Dongle Activation	7
2.2.	Network USB Dongle Activation	8
3.	Standalone Dongle Upgrade	9
3.1.	Standalone Dongle Upgrade Online	9
3.2.		
4.	Network Dongle Upgrade	12
4.1.	Network Dongle Upgrade Online	12
4.2.	Network Dongle Upgrade Offline	13

1. USB Dongle Bind License

1.1. Bind License Online

Instruction: Your computer has internet connected or you can find a computer with internet connected.


- 1. Insert your USB dongle to your computer.
- 2. Click Start button and find out USB Dongle License Tool in GstarCAD 2021 folder.



3. Choose Online method under Standalone Dongle tab and click Bind button.

USB Dongle License To	ool	×
	Dongle ID : 05413053	
Standalone Dongle	Product/Edition/Language License key	
Online		
Offline		
Network Dongle		
	Bind Unbind Unbind All Upgrade Synchronize	


4. Input the License key and click Bind button.

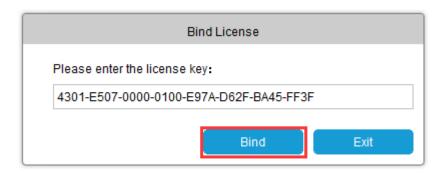

5. Click **OK** button to finish binding.

USB TOOLS	
Binding license is finished.	
	ок

6. You will see the detail product information after successfully binding the license key to your USB dongle.

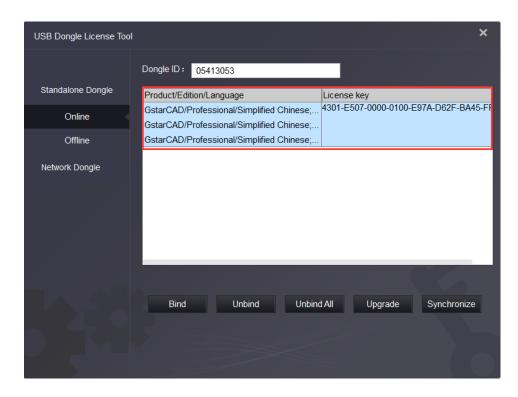

Bind License Online operation Network USB Dongle is the same as Standalone USB Dongle.

1.2. Bind License Offline

If your computer is not connected to the internet, you can choose offline mode to bind license to your standalone USB dongle.

Instruction: Your computer hasn't internet connected and your USB dongle is not allowed to unplug from your computer.

- 1. Run GstarCAD 2021 and access GstarCAD License Manager from Help-Register on your computer.
- 2. Click Dongle Upgrade(U) ,select the corresponding version and click GENERATE to generate .LOVX file, save it to your USB flash drive.

GstarCAD License Act	ivation	×
License Key (L)	Please follow the steps to upgrade your standalone dongle.	
USB Dongle (D)	CENERATE LOVX file. Send LOVX file to your local distributor/reseller from whom you purchased GstarCAE products to get LIVX file. LOAD LIVX file and click Upgrade button.)
Standalone Dongle(S)		
Network Dongle(N)		
Dongle Upgrade(U)	Upgrade	
Product Version:		
Professional Standard		
Education		
	Back(K) Exit(E)	

- 3. Go to another computer with internet connected, run USB Dongle License Tool (not necessary to down the package if the computer installed GstarCAD 2021)
- 4. Click Offline and click Load Request File to load the .LOVX file you saved in your USB flash drive. Then click Bind button.

Standalone Dongle Dongle ID : Online Product/Edition/Language
License key
Online
Offline
Network Dongle
Bind Upgrade Generate Upgrade File

5. Input the License key and click Bind button.



6. Click **OK** button to finish binding.

USB TOOLS	
Binding license is finished.	
	ок
	ОК

7. You will see the detail product information after successfully binding the license key to your USB dongle.

Bind License Offline operation Network USB Dongle is the same as Standalone USB Dongle.

2. USB Dongle Activation

2.1. Standalone USB Dongle Activation

After binding the license key with product information to your standalone USB dongle, run GstarCAD License Manager which you can access from Help menu and register in GstarCAD 2021. Click Standalone Dongle(S) and select a version of GstarCAD (Professional, Standard, and Education).

GstarCAD License Ma	nager	×
License Key (L)	Please click Activate button.	
USB Dongle (D)	License Information Product/Edition/Language License key GstarCAD/Professional/Simplified Chinese; Traditional 4301-E507-0000-0100-E97A-D62F-BA45-FF3F Chinese:English;a-JP:Russian;Korean;Geman;French	
Standalone Dongle(S)	:Polish;es-ES;Poituguese;Italy;Hungarian;Czech;/202	
Network Dongle(N)		
Dongle Upgrade(U)	Activate	
Product version:		
 Professional Standard Education 		
	Back(K) Exit(E)	5

Then click Activate button to finish the standalone dongle activation. Then restart your GstarCAD 2021.

GstarCAD License Ma	nager	×
License Key (L)	Please click Activate button.	
USB Dongle (D)	License Information Product/Edition/Language License key GstarCAD/Professional/Simplified Chinese,Traditional 4301-E507-0000-0100-E97A-D62F-BA45-FF3F Chinese,Englishja-PP;Russian,Korean,German,French	
Standalone Dongle(S)	Oliniese, English ja vir "nussian, Korean, Seman, French ;Polish,es-ES;Portuguese;Italy;Hungarian,Czech;/202	
Network Dongle(N)		
Dongle Upgrade(U)	Activate	
Product version: Professional Standard Education	Back(K) Exit(E)	

2.2. Network USB Dongle Activation

After binding the license key with product information to your Network USB dongle, run GstarCAD License Manager which you can access from Help menu and register in GstarCAD 2021. Click Network Dongle(S) and select a version of GstarCAD (Professional, Standard, and Education).

GstarCAD License Ma	nager		×
License Key (L)	Please enter the IP address or server nar	ne and click the activation button.	
Online Activation(O)	Server Name / IP	License Port	
Manual Activation(M)			
Network License(N)		Activate	
Borrow License(B)			
USB Dongle (D)			
Product version: Professional Standard Education			
		Back(K) Exit(E)	ļ

Specify server IP address and the License Port, then click Activate button to activate your software at client.

GstarCAD License Ma	nager	ډ	×
License Key (L)	Please enter the IP address or server	name and click the activation button.	
Online Activation(O)	Server Name / IP	License Port	
Manual Activation(M)	192.168.0.66	27000	
Network License(N)		Activate	
Borrow License(B)			
USB Dongle (D)			
Product version: Professional Standard Education		Back(K) Exit(E)	

3. Standalone Dongle Upgrade

3.1. Standalone Dongle Upgrade Online

If your encryption is Standalone Dongle (2012 and above version) and you have upgraded your software, then you must upgrade your dongle so that you can activate your new version. You can follow these steps to upgrade your dongle online.

Instruction: Your computer has internet connected or you can find a computer with internet connected.

- 1. Insert your USB dongle to your computer.
- 2. Access USB Dongle License Tool from Start button (Not necessary to download the USB Dongle License Tool package if the computer installed GstarCAD 2021).

📗 GstarCAD 2021	
🚰 AutoCAD Tool Palettes Import Tool	
GstarCAD 2021	
💈 Office OLE Drawing Object Converte	
Uninstall GstarCAD 2021	
🗧 USB Dongle License Tool	
🎼 Migrate Custom Settings	
GstarCAD NetWork License Manager	Ŧ
● Back	
Search programs and files]
🔗 😘 ér o 🖪	

- 3. Send the license key which you need to upgrade in your USB Dongle to your local distributor/reseller from whom you purchased GstarCAD products with the order invoice.
- 4. You will get the reply after the License Key upgraded.
- 5. Insert the dongle and access USB Dongle License Tool and click Upgrade or Synchronize button to upgrade your USB Dongle.

USB Dongle License Too	×	
	Dongle ID : 05413053	
Standalone Dongle	Product/Edition/Language License key	
Online	GstarCAD/Professional/Simplified Chinese, 4301-E507-0000-0100-E97A-D62F-BA45-F GstarCAD/Professional/Simplified Chinese, GstarCAD/Professional/Simplified Chinese	
Offline		
Network Dongle		
	Bind Unbind Unbind All Upgrade Synchronize	

6. You will see the detail product information after successfully upgrading the license key to your USB dongle.

3.2. Standalone Dongle Upgrade Offline

Instruction: Your computer hasn't internet connected and your USB dongle is not allowed to unplug from your computer.

- 1. Insert your USB dongle to your computer.
- 2. Run GstarCAD 2021 and access GstarCAD License Manager from Help-Register.
- 3. Click Dongle Upgrade(U) ,select the corresponding version and click GENERATE to generate .LOVX file save it to your USB flash drive.

GstarCAD License Act	ivation	×
License Key (L)	Please follow the steps to upgrade your standalone dongle.	
USB Dongle (D)	CENERATE LOVX file. Send LOVX file to your local distributor/reseller from whom you purchased GstarCAD products to get LIVX file. LOAD LIVX file and click Upgrade button.	
Standalone Dongle(S)		
Network Dongle(N)		
Dongle Upgrade(U)	Upgrade	
Product Version:		
 Professional Standard 		
 Education 		
	Back(K) Exit(E)	


- 4. Go to any computer with internet connected, run USB Dongle License Tool (not necessary to down the package if the computer installed GstarCAD 2021)
- 5. Click Offline and click Load Request File to load the .LOVX file you saved in your USB flash drive.

USB Dongle License Tool		×
	Load Request File Dongle ID :	
Standalone Dongle	Product/Edition/Language License key	
Online		
Offline		
Network Dongle		
	Bind Upgrade Generate Upgra	de File

- 6. Send the License Key which you need to upgrade in your USB Dongle to your local distributor / reseller from whom you purchased GstarCAD products with your order invoice.
- 7. You will get reply after License Key upgraded.
- 8. Click Upgrade button in Standalone Dongle offline from USB Dongle License Tool.
- 9. Click Generate Upgrade File button to generate .LIVX file, save it to your USB flash drive.

USB Dongle License Tool					×
	Load Request File	C:\Users\ovs\Desl	k top Dong	gle ID : 0541308	63
Standalone Dongle	Product/Edition/Langua	age	License key		
Online					
Offline					
Network Dongle					
	Bind	Upgrade		Generate Upgra	de File

- 10. Back to your computer and Insert USB flash drive and click LOAD button to load the .LIVX file you saved from another computer in GstarCAD License Manager.
- 11. Click Upgrade button to finish your USB dongle upgrading.

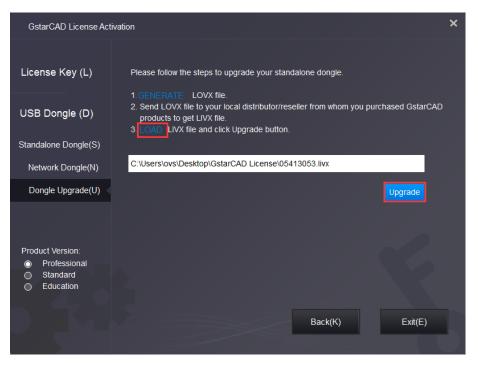

4. Network Dongle Upgrade

4.1. Network Dongle Upgrade Online

If your encryption is Network Dongle (2012 and above version) and you have upgraded your software, then you must upgrade your dongle so that you can activate your new version. You can follow these steps to upgrade your dongle online.

Instruction: Your computer has internet connected or you can find a computer with internet connected.

- 1. Install Network USB Dongle drive and then insert your Network USB dongle to your computer.
- 2. Access USB Dongle License Tool from Start button (Not necessary to download the USB Dongle License Tool package if the computer installed GstarCAD 2021).

	GstarCAD 2021	
	🚘 AutoCAD Tool Palettes Import Tool	
	G GstarCAD 2021	
	Office OLE Drawing Object Converte	
	Uninstall GstarCAD 2021	
	互 USB Dongle License Tool	
	🎳 Migrate Custom Settings	
	GstarCAD NetWork License Manager	•
4	Back	
	Search programs and files	
	y 🖇 乡 🖻	

- 3. Send the License Key which you need to upgrade in your USB Dongle to your local distributor / reseller from whom you purchased GstarCAD products with your order invoice.
- 4. You will get the response after the License Key upgraded.
- 5. Insert the dongle and access USB Dongle License Tool again and click Upgrade or Synchronize button to upgrade your USB Dongle.

USB Dongle License T	loc	×
	Dongle ID : 2504	
Standalone Dongle	Product/Edition/Language License key	Count
Network Dongle	GstarCAD/Professional/English/ FB01-E507-0000-0100-076A-7826-3220-0400 2021	3
Online		
Offline		
	Bind Unbind Unbind All Upgrade Synchro	nize


6. You will see the detail product information after successfully upgrading the license key to your USB dongle.

4.2. Network Dongle Upgrade Offline

If your encryption is **Network Dongle** (2012 and above version) and you have upgraded your software, then you must upgrade your dongle so that you can activate your new version. You can follow these steps to upgrade your dongle online.

Instruction: Your computer hasn't internet connected and your network USB dongle is not allowed to unplug from your computer.

- 1. Install Network USB Dongle drive to your computer.
- 2. Please go to GstarCAD 2021 installation file location, and run DongleUpgradeTool.



3. Click **GENERATE** button to generate the request file with the extension .LOCX. Save it to your USB flash drive.

Dongle Upgrade Tool (for C	SstarCAD 2020 and earlier versions)	×
Standalone Dongle	Please follow the steps to upgrade network dongle.	
Network Dongle	1. GENERATE LOCX file.	
	2. Send the LOCX file to your local dealer for LICX file.	
	3. LOAD LICX file and click the Upgrade button.	
	Upgrad	le

4. Run GstarCAD USB Dongle License Tool (not necessary to download and install this tool if the computer installed GstarCAD 2021) from any computer with internet connected.

5. Click Load Request File from Network Dongle tab - Offline option to load the LOCX file you saved in the USB flash drive.

USB Dongle License Tool			×
	Load Request File		Dongle ID:
Standalone Dongle	Product/Edition/Language	License key	Count
Network Dongle			
Online			
Offline			
	Bind Upgrade		Generate Upgrade File

- 6. Send the License Key which you need to upgrade in your USB Dongle to your local distributor / reseller from whom you purchased GstarCAD products with your order invoice.
- 7. You will get the response after the License Key upgraded.
- 8. Click Upgrade and Generate Upgrade File button from Network Dongle tab Offline option to generate the .LIVX file from the computer with internet connected and save it to your USB flash drive.

USB Dongle License Tool			×	
	Load Request File		Dongle ID:	
Standalone Dongle	Product/Edition/Language	License key	Count	
Network Dongle				
Online				
Offline				
	Bind Upgrade		Generate Upgrade File	


9. Back to your computer and Insert USB flash drive and Run DongleUpgradeTool again from GstarCAD 2021 installation file location, please click LOAD button to load the .LIVX file you saved from another computer in GstarCAD License Manager.

Dongle Upgrade Tool (for	GstarCAD 2020 and earlier versions)	×
Standalone Dongle	Please follow the steps to upgrade network dongle.	
Network Dongle	1. GENERATE LOCX file.	
	2. Send the LOCX file to your local dealer for LICX file.	
	3 LOAD JCX file and click the Upgrade button.	
	Upgrade	

Run GstarCAD License Manager from Help-Register in GstarCAD 2021. Choose the Network Dongle(N) option and the corresponding version. Input the server Name/IP and click Activate button to activate your Network USB dongle.

GstarCAD License Act	ivation	×
License Key (L)	Please enter server name or server IP address and click Activate button. Server Name/IP	
USB Dongle (D)	192.168.0.66	
Standalone Dongle(S)	Activate	
Network Dongle(N)		
Dongle Upgrade(U)		
Product Version:		
 Professional Standard 		
Education		
	Back(K) Exit(E)	



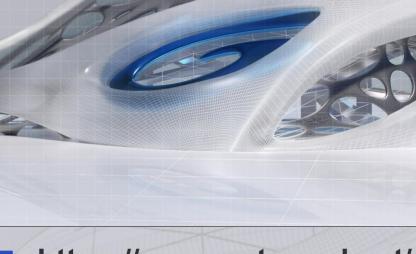

https://www.gstarcad.net/

